


**NOTE:**

1. FOR GENERAL REFERENCE ONLY – NOT INTENDED FOR PROJECT-SPECIFIC USE OR TO FULLY DEFINE A WARRANTY ELIGIBLE APPLICATION.
2. REFER TO LATEST REVISION OF APPROPRIATE APPLICATION SPECIFICATIONS, PRODUCT DATA SHEETS (PDS) AND GENERAL INSTRUCTIONS FOR ADDITIONAL REQUIREMENTS.
3. EXISTING / NON-GACO ROOFING COMPONENTS AND HARDWARE ARE DEPICTED FOR CONTEXT ONLY. NOT INTENDED AS A STATEMENT OF SPECIFICATION.
4. APPLY CENTERED ON SEAM AT A WIDTH OF 4 IN (100 MM) AND A CONTINUOUS MINIMUM WET FILM THICKNESS (WFT) OF 64 MILS.

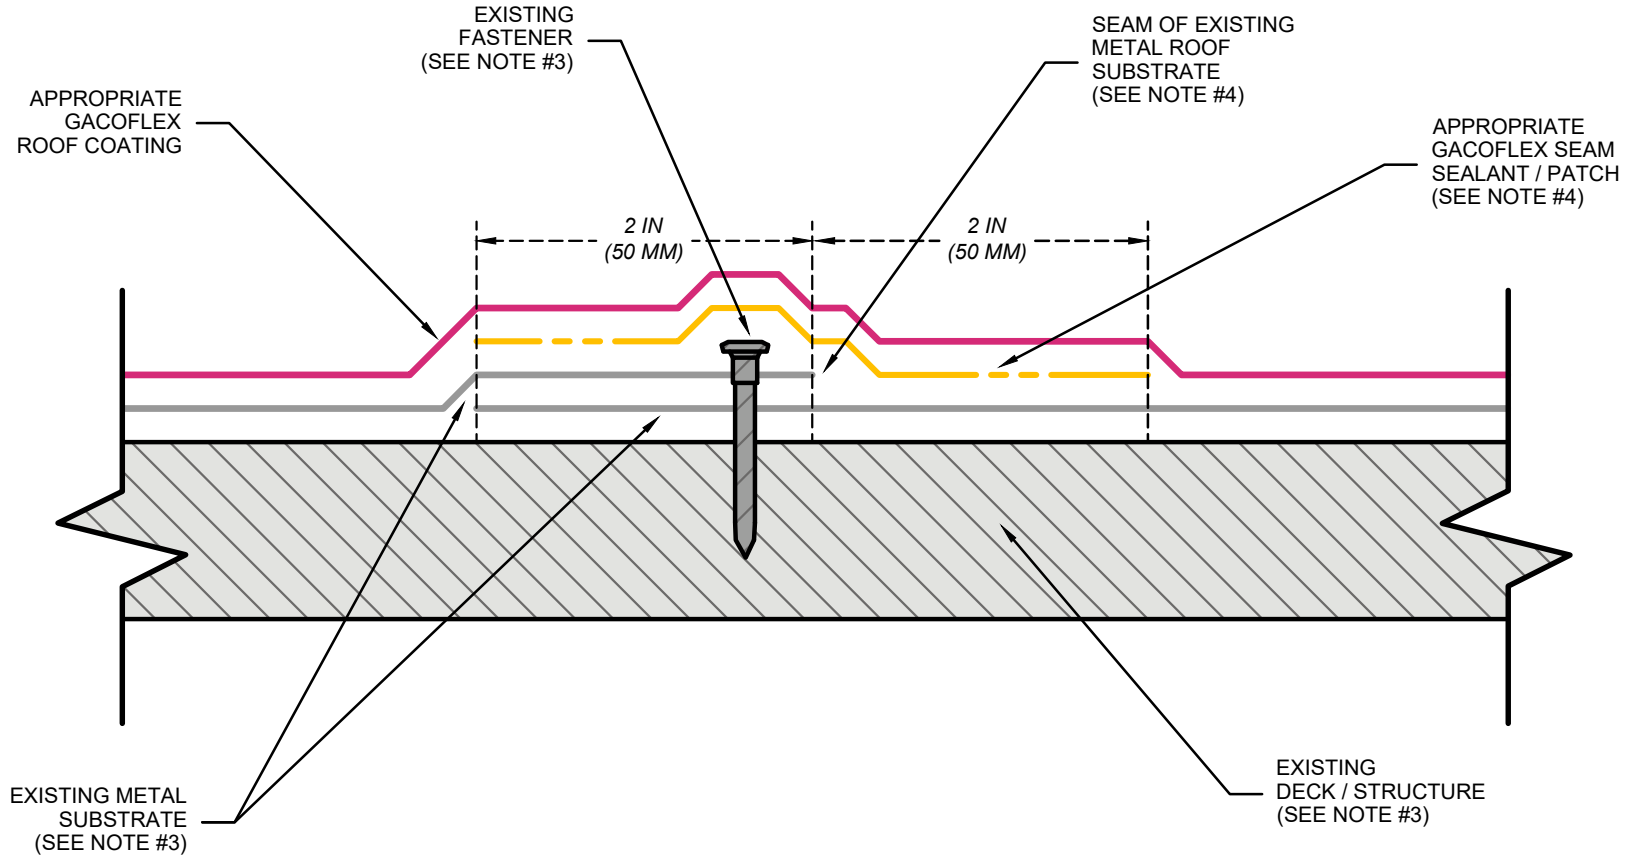

**Gaco™**

**INTERNAL SEAM TERMINATION (HORIZONTAL) – METAL SUBSTRATES**

**MAXIMUM WARRANTY TERM:**  
REFER TO APPROPRIATE APPLICATION SPECIFICATIONS

**GACOFLEX™ COATING SOLUTIONS CATEGORY:**

ROOF COATING (RC)

**COMPATIBLE SUBSTRATE TYPES:**

REFER TO APPROPRIATE APPLICATION SPECIFICATIONS

**REVISION DATE:**  
10/04/2022

DETAIL NO.  
**GA-RC-T-4**